



# North American Pipe Corporation™

## ASTM D1785/D2665: Schedule 40/DWV Dual Rated Pipe

North American Pipe's ASTM D1785 Schedule 40 Dual Rated (both Pressure and DWV rating) product line is manufactured to meet the needs of a broad range of industrial, commercial and residential piping systems. With top quality raw materials and modern processing technology, North American Pipe's ASTM D1785 Schedule 40 Dual Rated pipe meets all industry standards in addition to our own rigorous quality control standards. Our ASTM D1785 Schedule 40 Dual Rated product line carries both a pressure and DWV rating to give the designer, installer and end user the flexibility of one product for two distinct applications. Whether specifying or installing our pipe you can be assured that North American Pipe will provide the pipe "Right, On Time, All the Time".



### Short Form Specification ASTM D1785/D2665 Sch 40/DWV Pipe


<b>Pipe Standard:</b>	ASTM D1785 ASTM D2665
<b>Pipe Compound:</b>	ASTM D1784 Cell Class 12454
<b>End Type:</b>	Plain or Belled
<b>Certifications:</b>	ANSI/NSF Standard 61 ANSI/NSF Standard 14
<b>Applications:</b>	Industrial, Commercial & Residential Water Distribution & Drain Waste & Vent
<b>Color:</b>	White
<b>Lay Length:</b>	10' or 20'
<b>Installation:</b>	North American Pipe's Installation Guide for Solvent Welded PVC Pipe

Rev: 04/2012



# North American Pipe Corporation™

## ASTM D1785/D2665: Schedule 40/DWV Dual Rated Pipe

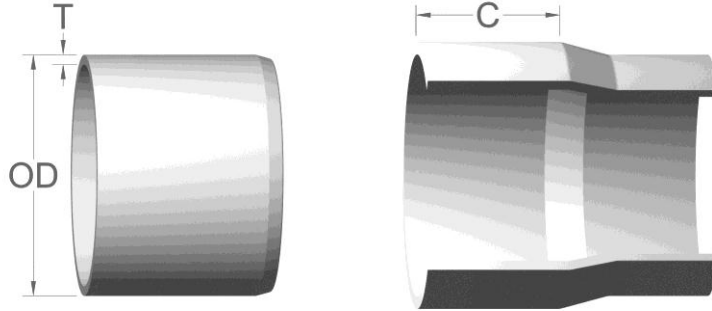

NOMINAL PIPE SIZE	OUTSIDE DIA. - NOM. (OD)	**APPROX. BELL DEPTH (C)	(T)	PRESSURE RATING (psi)
½"	.84	1.75	.109	600
¾"	1.05	2.50	.113	480
1"	1.32	2.50	.133	450
1¼"	1.66	2.50	.140	370
1½"	1.90	2.50	.145	330
2"	2.38	3.25	.154	280
2½"	2.88	3.50	.203	300
3"	3.50	4.25	.216	260
4"	4.50	5.50	.237	220
5"	5.56	6.00	.258	190
6"	6.63	7.00	.280	180
8"	8.63	7.50	.322	160
10"	10.75	8.50	.365	140
12"	12.75	10.00	.406	130
14"	14.00	10.00	.437	130
16"	16.00	10.00	.500	130
18"	18.00	12.00	.562	130
20"	20.00	12.00	.593	120
24"	24.00	12.00	.687	120

Note: These dimensions are for estimating purposes only