



North American Pipe Corporation™

ASTM F891: *Foam Core DWV Pipe*

North American Pipe's ASTM F891 Schedule 40 Foam Core (DWV Only) product line is manufactured to meet the needs of a broad range of residential and commercial drain waste and vent piping systems. With top quality raw materials and modern processing technology North American Pipe's ASTM F891 Schedule 40 Foam Core pipe meets all industry standards in addition to our own rigorous quality control standards. Our ASTM F891 Schedule 40 Foam Core is the perfect choice for interior non-pressure applications. Whether specifying or installing our pipe, you can be assured that North American Pipe will provide the pipe "Right, On Time, All the Time".



Short Form Specification ASTM F891 Foam Core DWV Pipe


Pipe Standard:	ASTM F891
Pipe Compound:	ASTM D4396 Cell Class 11432
End Type:	Plain or Belled
Certifications:	ANSI/NSF Standard 14
Applications:	Residential & Commercial Drain Waste & Vent *** <i>not rated for pressure</i>
Color:	White
Lay Length:	10' or 20'
Installation:	North American Pipe's Installation Guide for Solvent Welded PVC Pipe

Rev: 04/2012



North American Pipe Corporation™

ASTM F891: Foam Core DWV Pipe

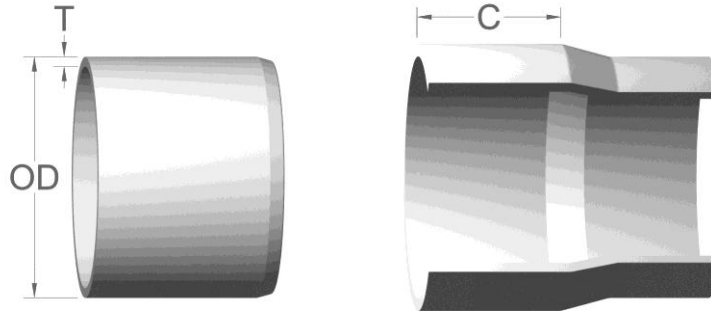

NOMINAL PIPE SIZE	OUTSIDE DIA. – NOM. (OD)	**APPROX. BELL DEPTH (C)	Sch 40 (T)
½"	.84	1.75	.147
¾"	1.05	2.50	.154
1"	1.32	2.50	.179
1¼"	1.66	2.50	.191
1½"	1.90	2.50	.200
2"	2.38	3.25	.218
2½"	2.88	3.50	.276
3"	3.50	4.25	.300
4"	4.50	5.50	.337
6"	6.61	7.00	.432
8"	8.61	7.50	.500
10"	10.74	8.50	.593
12"	12.74	10.00	.687

Note: These dimensions are for estimating purposes only